THE NEW

DOHA

KITCHEN EQUIPMENT AND SERVICES

A DIVISION OF DOHA COOLING



COMPLETE SOLUTIONS FOR

COLD ROOM & REFRIGERATION SYSTEMS

DESIGN | SUPPLY | INSTALLATION
COMMISSIONING | AFTER SALES SUPPORT

Reliable and energy efficient cold room & refrigeration solutions tailored to your business needs.









PRECISE TEMPERATURE CONTROL

ENERGY EFFICIENT

RELIABLE PERFORMANCE

EXPERT INSTALLATION

AFTER SALES SUPPORT

QUALITY • RELIABILITY • INNOVATION

Website
www.dctsqatar.com

Mobile
+974 77060676

Email
farhan@dctsqatar.com

TNDK

The New Doha Kitchen Equipment Services W.L.L.
P.O. Box 80247, Doha – Qatar
info@dkeqatar.com

QUOTATION

REFERENCE	DATE	VALIDITY
QUT/DCTS/068/2026	13 October 2026	15 Days from quote date

TO	FROM
M/s. Midas Doha, Qatar Attn: Mr. Premjith	**The New Doha Kitchen Equipment Services W.L.L.** P.O. Box 80247, Doha – Qatar Email: farhan@dctsqatar.com Prepared by: Farhan – Sales Engineer

Subject: Re-erection of Chiller Room (10.20 × 4.00 × 2.50 m) using Existing Panels & Existing Refrigeration Machine — with Additional Panels, New Sliding Door, Control Panel & Complete Accessories

Dear Sir, with reference to the above subject, we thank you for the opportunity to quote for your chiller room project. Please find below our detailed technical and commercial offer for the re-erection of a 10.20 × 4.00 × 2.50 m chiller room using your existing insulated panels and existing refrigeration machine, together with the supply and installation of additional panels, a new sliding cold room door, a new control panel box and complete installation accessories, including testing and commissioning.

Project description:

ROOM TYPE	QTY	TEMPERATURE	EXTERNAL DIMENSIONS	PANEL THICKNESS
CHILLER	1	+2°C to +8°C	10.20 × 4.00 × 2.50 m	100 mm (to match existing)

1. PANEL DETAILS



Panel Type	Pre-insulated Polyurethane (PUF) Sandwich Panel
Panel Thickness	100 mm — new panels to match existing panels (thickness to be confirmed at site survey)
Insulation Core	CFC-free injected polyurethane foam, density 40 ± 2 kg/m³
Skin Material	0.5 mm pre-painted galvanized steel (PPGI), food-grade white
Locking System	Cam-lock / Hook-lock type for tight, leak-proof joints
Thermal Conductivity (k)	0.022 W/m·K (typical)
Fire Rating	Class B / Self-extinguishing
Wall Coverage	2 × (10.20 × 2.50) + 2 × (4.00 × 2.50) = 71.00 sqm (perimeter run 28.40 m)
Ceiling Coverage	10.20 × 4.00 = 40.80 sqm (4.15 m panels spanning the 4.00 m width)
Floor Coverage	Not applicable — chiller installed on existing floor (no insulated floor)
Total Panel Quantity	Required: 111.80 sqm | Existing (client) panels re-used: 85.95 sqm | New panels supplied by TNDK: 41.57 sqm
Existing Panels (Client)	285 × 102 cm – 20 pcs | 285 × 54 cm – 2 pcs | 285 × 48 cm – 1 pc | 415 × 102 cm – 5 pcs | 415 × 53 cm – 1 pc (Total 29 pcs; 2.85 m wall panels trimmed to 2.50 m on site)
Additional Panels (TNDK)	2.50 m × 1.02 m – 8 pcs (walls) | 4.15 m × 1.02 m – 5 pcs (ceiling) | Total 13 pcs
Coverage Check	Walls: 23 existing + 8 new = 30.12 m panel run vs 28.40 m perimeter ✓ | Ceiling: 6 existing + 5 new = 10.73 m vs 10.20 m room length ✓

2. DOOR DETAILS




Door Type	Sliding Cold Room Door (single leaf, manual operation)
Clear Opening Size	1500 mm (W) × 2000 mm (H)
Door Thickness	100 mm — insulated PUF leaf, matching wall panel
Frame	Heated PVC/Aluminum anti-condensation frame
Track & Rollers	Heavy-duty top-hung sliding track with rollers, floor guide and end stoppers
Handle / Lock	Pull handle with lock provision and internal safety release (anti-trap)
Gasket	Magnetic / silicone double gasket, food-grade
Quantity	1 (one) No. — new

3. ANGLES, SILICONE & ACCESSORIES



Internal Coving	Aluminum sanitary coving at all wall–floor and wall–ceiling joints
External Trim	Aluminum corner angles / capping at all external corners
Sealants	Food-grade neutral-cure silicone sealant at all panel joints, door frame and floor seam
PU Foam	Expanding polyurethane foam for joint backing
Fasteners	Stainless steel rivets, screws and washers
Vapor Sealing	Continuous vapor barrier at panel–floor interface

4. FLOORING DETAILS

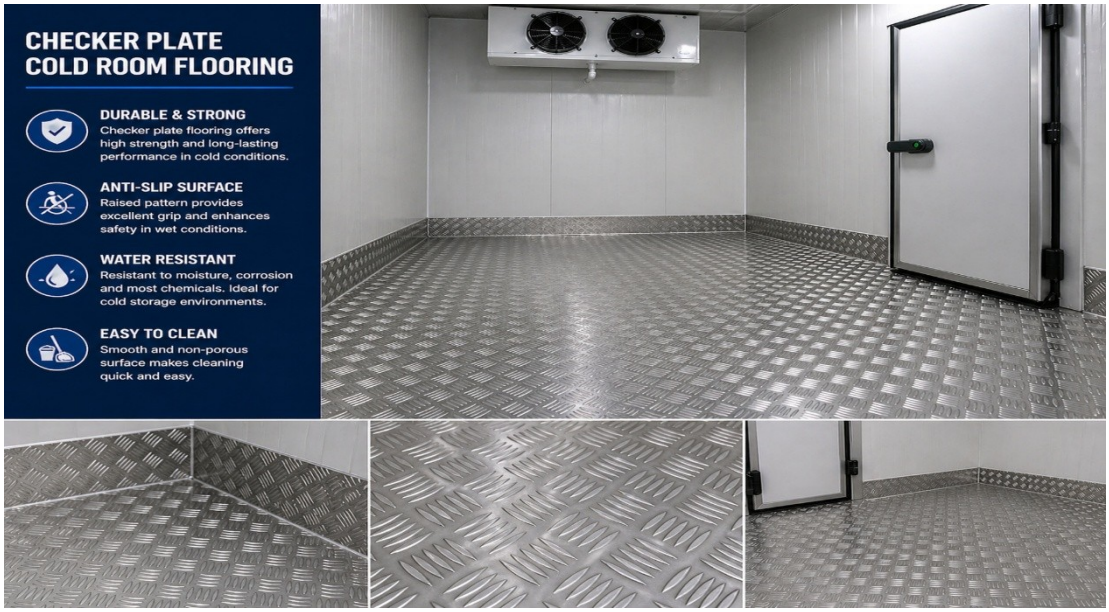

Insulated Floor Panel	Not included — chiller to be erected on the existing level floor
Plywood Layer	Not included
Top Finish	Existing floor finish (by client)
Edge Sealing	Aluminum floor U-channel / coving at wall-panel base with silicone seal
Load Suitability	Subject to existing floor condition

5. REFRIGERATION MACHINE DETAILS



Condensing Unit (Outdoor)




Evaporator / Air Cooler (Indoor)

System Type	Split-type refrigeration system — client's EXISTING machine (1 set), shifted and re-installed by TNDK
Condensing Unit	Existing — Model AUH 405 CS (client supplied)
Machine Condition	Existing unit re-used: general service, leak check and inspection before re-commissioning. Condition and capacity of the existing machine remain the client's responsibility.
Refrigerant	As per existing unit nameplate — refrigerant charging included
Evaporator (Air Cooler)	Existing — Model F31HC235E_6 (client supplied), ceiling-mounted inside the chiller
Mounting	Evaporator ceiling-suspended inside the room; condensing unit on outdoor pad
Operating Temperature	Chiller: +2°C to +8°C
Defrost	As per existing evaporator, controlled from the new control panel
Drain Line	Insulated drain line with heating tape (where exposed)

6. MACHINE CAPACITY (HEAT LOAD)

Internal Volume	10.20 × 4.00 × 2.50 = 102 m^3 (external)
Design Ambient	+45°C (Doha summer condition)
Design Room Temp.	Chiller: +4°C
Estimated Heat Load	Approx. 6.0 – 7.5 kW (indicative, for a 102 m^3 chiller at +45°C ambient; final load depends on product quantity and door openings)
Selected Capacity	Existing condensing unit AUH 405 CS with evaporator F31HC235E_6 to be used. TNDK will check the nameplate capacity against the estimated load at site survey and advise of any shortfall before installation.
Run Time	Designed for ≤ 16 hours/day operation
Power Supply	415 V / 3-Phase / 50 Hz (or 230 V / 1-Phase as confirmed at site)

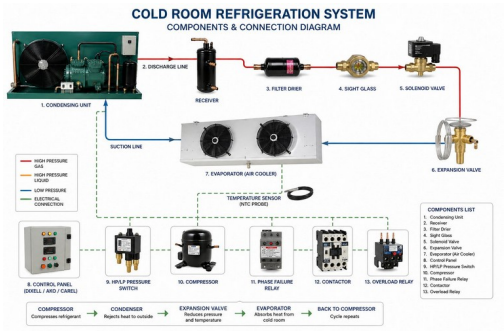


Refrigeration system components & connection schematic — for reference.

7. CONTROL PANEL DETAILS



Digital Temperature Controller

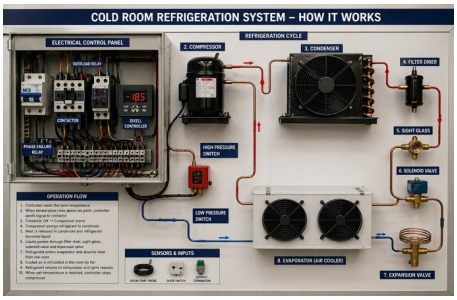

Typical Wiring Schematic

Controller	Eliwell / Dixell / Carel digital temperature controller
Display	Digital LED display showing set point and actual room temperature
Functions	Compressor ON/OFF, evaporator fan control, electric defrost timer, alarm output
Protections	Overload relay, phase-failure relay, HP/LP cut-out switches
Indicators	Power-ON, Compressor-ON, Defrost, Alarm pilot lamps
Safety	MCB, contactors and emergency stop in metallic enclosure (IP54)
Door Frame Heater	Anti-condensation heater wired through control panel
Internal Light	Vapor-proof LED light inside the room with ON/OFF switch outside

8. SCOPE OF WORK

1. Site survey, inspection of existing panels and machine, and confirmation of final room dimensions.
2. Dismantling (where erected), shifting within site, cleaning and trimming of client's existing panels (29 pcs) to 2.50 m height, and re-erection.
3. Supply and installation of additional 100 mm PUF panels: 2.50 m – 8 pcs (walls) and 4.15 m – 5 pcs (ceiling).
4. Supply and installation of one (1) No. new sliding cold room door, 1500 × 2000 mm clear opening.
5. Disconnection, shifting and re-installation of client's existing condensing unit (AUH 405 CS) and evaporator (F31HC235E_6), including general service.
6. New refrigeration copper piping, armaflex insulation, filter drier, sight glass and insulated drain line, with refrigerant charging.
7. Electrical works from the cold room control panel onward — including power, control wiring, internal LED light, door frame heater and emergency switch.
8. Supply and mounting of new digital control panel box with all safeties.
9. Supply of complete accessories — aluminum coving, corner angles, floor U-channel, silicone, PU foam, rivets and fasteners — with full vapor sealing.
10. Pressure testing, vacuum, gas charging, testing and commissioning.
11. Handover with operation training and as-built documentation.

9. EXCLUSIONS

1. Civil works, foundation, leveling and any structural support.
2. Power supply (Main DB), main cable run from MDB to cold room control panel.
3. Any false ceiling removal, modifications or restoration of existing finishes.
4. Drain piping beyond 3 m from the evaporator drain outlet.
5. Backup power, UPS, generator or stabilizer.
6. Telephone, CCTV, BMS or IoT integration (available on request — separately quoted).
7. Any taxes, duties or municipality fees other than those explicitly mentioned.
8. Lifting equipment / cranes if access requires more than standard manual handling.
9. Working at heights above 3 m (additional scaffolding cost shall apply).
10. Insulated floor, floor panels or floor finish works.
11. Replacement of damaged existing panels, or repair / spare parts / compressor replacement for the existing refrigeration machine — if found necessary during inspection, these will be quoted separately.
12. Any item not specifically listed in the Scope of Work.

10. PRICING / BILL OF QUANTITIES

SL#	Description (Size & Quantity)	Amount (QAR)
1	Re-erection of chiller room 10.20 m × 4.00 m × 2.50 m (102 m^3) using client's existing panels (29 pcs — dismantling, shifting, trimming to 2.50 m and re-erection), plus supply & installation of additional 100 mm PUF panels: 2.50 m – 8 pcs and 4.15 m – 5 pcs (41.57 sqm).	12,000.00
2	Supply & installation of one (1) No. new sliding cold room door, clear opening 1500 × 2000 mm, 100 mm thick, with heavy-duty track, rollers, door heater, pull handle and inside safety release.	7,000.00
3	Supply & installation of complete accessories: aluminum coving, corner angles, floor U-channel, food-grade silicone, PU foam, rivets, fasteners and full vapor sealing.	2,500.00
4	Disconnection, shifting & re-installation of client's existing refrigeration machine (Condensing unit AUH 405 CS + Evaporator F31HC235E_6) with general service, new copper piping, armaflex insulation, filter drier, sight glass, insulated drain line and refrigerant charging.	5,000.00
5	Supply & installation of new digital control panel box with all safeties, internal LED lights, door heater wiring and complete electrical works from control panel onward.	4,500.00
6	Testing, commissioning, transportation, mobilization, lifting at site and handover with operation training.	2,000.00

GRAND TOTAL (Lump Sum)	**QAR 33,000.00**

Amount in Words: ***Qatari Riyals Thirty Three Thousand Only.***



11. WARRANTY

Cold Room Panels & Door	New panels & new sliding door: 12 months from handover against manufacturing defects. Existing re-used panels: workmanship only
Refrigeration Compressor	Existing machine — not covered (client's re-used equipment); TNDK re-installation workmanship: 12 months
Evaporator & Condenser Coils	Existing — not covered under warranty
Electrical Components & Controls	New control panel & electricals: 12 months from date of commissioning
Workmanship	12 months from date of handover
Warranty Exclusions	Damage due to misuse, power surge, improper voltage, water ingress, unauthorized modification or absence of routine maintenance

12. DELIVERY & WORK COMPLETION

Material Delivery	2 – 3 weeks from date of LPO and approved advance payment (sliding door lead time)
Site Mobilization	Within 3 working days of material arrival at site
Installation Period	5 – 6 working days for a civil-ready site
Testing & Commissioning	1 – 2 working days after installation completion
Total Project Duration	Approx. 3 – 4 weeks from LPO (subject to site readiness)
Working Hours	Standard working days, 08:00 – 17:00 (extended hours billed separately)



13. PAYMENT & COMMERCIAL TERMS

1. 50% advance payment along with confirmed Local Purchase Order (LPO).
2. 40% on delivery of materials at site.
3. 10% balance after successful testing, commissioning and handover.
4. Payment by cheque / bank transfer in favor of The New Doha Kitchen Equipment Services W.L.L.
5. Prices are quoted in Qatari Riyals (QAR) and are exclusive of VAT, if applicable.
6. This quotation is valid for 15 days from the date of issue.

We trust that the above offer meets your requirements and look forward to your favorable response. Should you require any further clarification or technical detail, please do not hesitate to contact us.

Thank you for the opportunity.

Best Regards,

Farhan
Sales Engineer
The New Doha Kitchen Equipment Services W.L.L & Doha Cooling Trading & Solutions W.L.L
Email: farhan@dctsqatar.com