THE NEW

DOHA

KITCHEN EQUIPMENT AND SERVICES

A DIVISION OF DOHA COOLING



COMPLETE SOLUTIONS FOR

COLD ROOM & REFRIGERATION SYSTEMS

DESIGN | SUPPLY | INSTALLATION
COMMISSIONING | AFTER SALES SUPPORT

Reliable and energy efficient cold room & refrigeration solutions tailored to your business needs.









PRECISE TEMPERATURE CONTROL

ENERGY EFFICIENT

RELIABLE PERFORMANCE

EXPERT INSTALLATION

AFTER SALES SUPPORT

QUALITY • RELIABILITY • INNOVATION

Website
www.dctsqatar.com

Mobile
+974 77060676

Email
farhan@dctsqatar.com

QUOTATION

REFERENCE	DATE	VALIDITY
QUT/DCTS/069/2026	13 October 2026	15 Days from quote date

TO	FROM
M/s. THK Restaurant Doha, Qatar Attn: Mr. Isa	**The New Doha Kitchen Equipment Services W.L.L.** P.O. Box 80247, Doha – Qatar Email: farhan@dctsqatar.com Prepared by: Farhan – Sales Engineer

Subject: Supply, Installation, Testing & Commissioning of Two (2) Chiller Rooms

Dear Sir, with reference to the above subject, we thank you for the opportunity to quote for your cold storage project. Please find below our detailed technical and commercial offer for the supply, installation, testing and commissioning of two (2) chiller rooms with 100 mm PUF panels, cold room doors, refrigeration systems, control panels and accessories (without insulated flooring).

Project description:

ROOM TYPE	QTY	TEMPERATURE	EXTERNAL DIMENSIONS	PANEL THICKNESS
CHILLER ROOM 01	1	+2°C to +8°C	3.00 × 2.00 × 2.00 m	100 mm
CHILLER ROOM 02	1	+2°C to +8°C	4.00 × 3.00 × 2.00 m	100 mm

1. PANEL DETAILS



Panel Type	Pre-insulated Polyurethane (PUF) Sandwich Panel
Panel Thickness	100 mm
Insulation Core	CFC-free injected polyurethane foam, density 40 ± 2 kg/m³
Skin Material	0.5 mm pre-painted galvanized steel (PPGI), food-grade white
Locking System	Cam-lock / Hook-lock type for tight, leak-proof joints
Thermal Conductivity (k)	0.022 W/m·K (typical)
Fire Rating	Class B / Self-extinguishing
Wall Coverage	CHILLER 01: 2 × (3.0 × 2.0) + 2 × (2.0 × 2.0) = 20.00 sqm | CHILLER 02: 2 × (4.0 × 2.0) + 2 × (3.0 × 2.0) = 28.00 sqm | Total: 48.00 sqm
Ceiling Coverage	CHILLER 01: 3.0 × 2.0 = 6.00 sqm | CHILLER 02: 4.0 × 3.0 = 12.00 sqm | Total: 18.00 sqm
Floor Coverage	Not included — rooms erected on existing level floor (no insulated floor)
Total Panel Quantity	CHILLER 01: 26.00 sqm | CHILLER 02: 40.00 sqm | Grand Total: 66.00 sqm

2. DOOR DETAILS




Door Type	Hinged Cold Room Door (single leaf)
Clear Opening Size	900 mm (W) × 1900 mm (H)
Door Thickness	100 mm — matching wall panel
Frame	Heated PVC/Aluminum anti-condensation frame
Hinges	Heavy-duty self-closing hinges (3 Nos.)
Handle / Lock	Safety latch handle with internal release (anti-trap)
Gasket	Magnetic / silicone double gasket, food-grade
Quantity	2 (one per room)

3. ANGLES, SILICONE & ACCESSORIES



Internal Coving	Aluminum sanitary coving at all wall–floor and wall–ceiling joints
External Trim	Aluminum corner angles / capping at all external corners
Sealants	Food-grade neutral-cure silicone sealant at all panel joints, door frame and floor seam
PU Foam	Expanding polyurethane foam for joint backing
Fasteners	Stainless steel rivets, screws and washers
Vapor Sealing	Continuous vapor barrier at panel–floor interface

4. FLOORING DETAILS

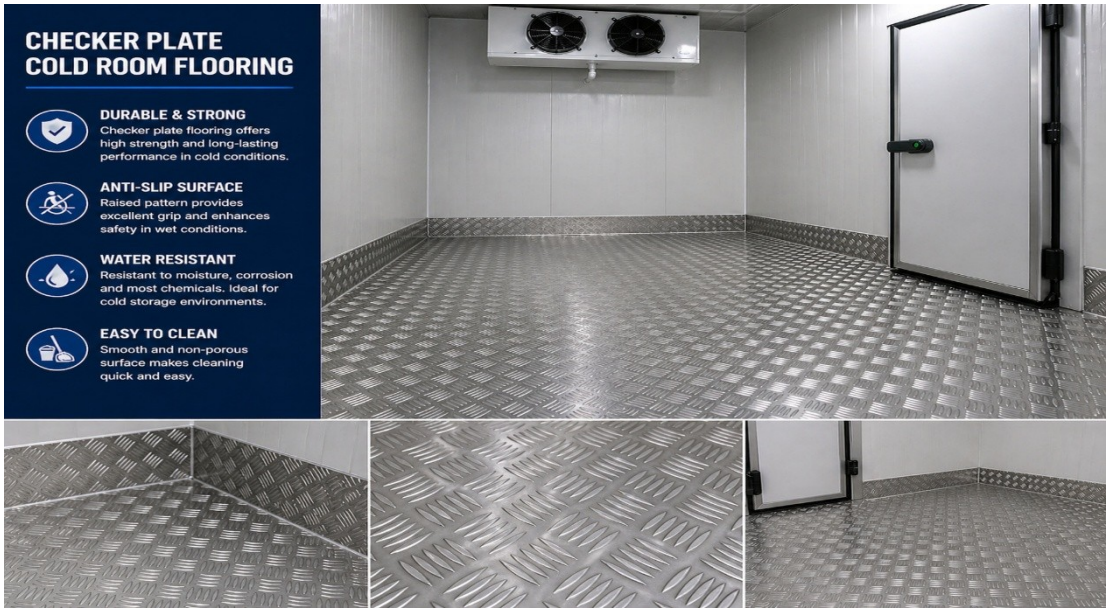

Insulated Floor Panel	Not included — chiller rooms erected on the existing level floor
Plywood Layer	Not included
Top Finish	Existing floor finish (by client)
Edge Sealing	Aluminum floor U-channel / coving at wall-panel base with silicone seal
Load Suitability	Subject to existing floor condition

5. REFRIGERATION MACHINE DETAILS



Condensing Unit (Outdoor)




Evaporator / Air Cooler (Indoor)

System Type	Split-type refrigeration system (2 sets: 1 per chiller room)
Condensing Unit	Air-cooled, hermetic / semi-hermetic compressor with weatherproof housing
Compressor Brand	Tecumseh / Danfoss condensing units — Chiller 01: 2 HP | Chiller 02: 2.5 HP
Refrigerant	R404A / R449A (eco-friendly, non-ozone-depleting)
Evaporator (Air Cooler)	Tecumseh / Gunay forced-draft unit cooler with axial fans (2 units: 1 per room)
Mounting	Evaporator ceiling-suspended inside the room; condensing unit on outdoor pad
Operating Temperature	Chiller 01 & Chiller 02: +2°C to +8°C
Defrost	Timer-controlled defrost via digital controller with termination thermostat
Drain Line	Insulated drain line with heating tape (where exposed)

6. MACHINE CAPACITY (HEAT LOAD)

Internal Volume	CHILLER 01: 3.0 × 2.0 × 2.0 = 12 m^3 | CHILLER 02: 4.0 × 3.0 × 2.0 = 24 m^3 | Combined: 36 m^3
Design Ambient	+45°C (Doha summer condition)
Design Room Temp.	+4°C (both rooms)
Estimated Heat Load	Chiller 01: approx. 1.5 – 2.0 kW | Chiller 02: approx. 2.5 – 3.0 kW (indicative, at +45°C ambient)
Selected Capacity	Chiller 01: 2 HP Tecumseh / Danfoss condensing unit | Chiller 02: 2.5 HP Tecumseh / Danfoss condensing unit — each with matching Tecumseh / Gunay evaporator (≥ 20% safety margin)
Run Time	Designed for ≤ 16 hours/day operation
Power Supply	415 V / 3-Phase / 50 Hz (or 230 V / 1-Phase as confirmed at site)

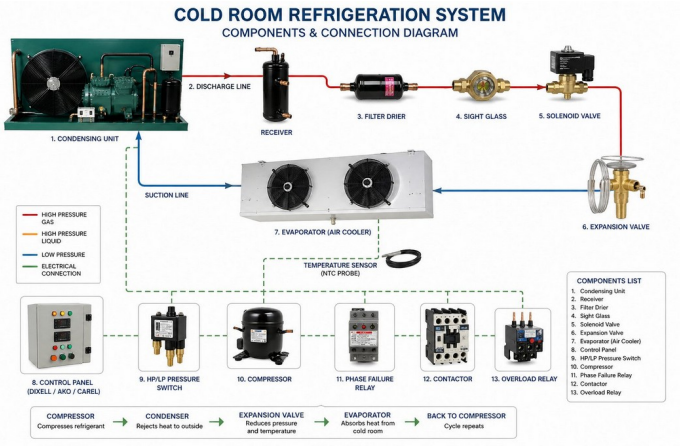


Refrigeration system components & connection schematic — for reference.

7. CONTROL PANEL DETAILS



Digital Temperature Controller

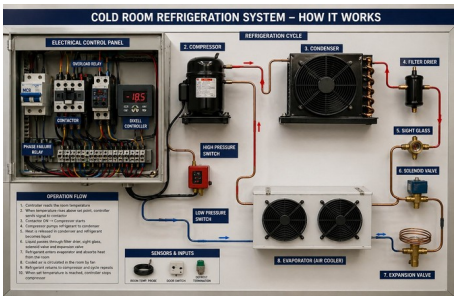

Typical Wiring Schematic

Controller	Eliwell / Dixell / Carel digital temperature controller
Display	Digital LED display showing set point and actual room temperature
Functions	Compressor ON/OFF, evaporator fan control, electric defrost timer, alarm output
Protections	Overload relay, phase-failure relay, HP/LP cut-out switches
Indicators	Power-ON, Compressor-ON, Defrost, Alarm pilot lamps
Safety	MCB, contactors and emergency stop in metallic enclosure (IP54)
Door Frame Heater	Anti-condensation heater wired through control panel
Internal Light	Vapor-proof LED light inside the room with ON/OFF switch outside

8. SCOPE OF WORK

1. Site survey and confirmation of final room dimensions before fabrication.
2. Supply of 100 mm PUF sandwich panels for walls and ceiling (total 66 sqm for both rooms).
3. Supply and installation of two (2) Nos. hinged cold room doors (900 × 1900 mm), one per room.
4. No insulated floor — rooms erected on the existing level floor with aluminum floor U-channel and silicone sealing.
5. Supply and installation of two (2) sets of condensing unit and matching evaporator — 2 HP for Chiller 01 and 2.5 HP for Chiller 02.
6. Refrigeration interconnecting copper piping, armaflex insulation and insulated drain line — included in Items 1 & 2.
7. Electrical works from the cold room control panel onward — including power, control wiring, internal LED light, door frame heater and emergency switch.
8. Supply and mounting of two (2) digital control panels with all safeties.
9. Aluminum coving, corner angles, silicone sealing and full vapor sealing.
10. Pressure testing, vacuum, gas charging, testing and commissioning.
11. Handover with operation training and as-built documentation.

9. EXCLUSIONS

1. Civil works, foundation, leveling and any structural support.
2. Power supply (Main DB), main cable run from MDB to cold room control panel.
3. Any false ceiling removal, modifications or restoration of existing finishes.
4. Drain piping beyond 3 m from the evaporator drain outlet.
5. Backup power, UPS, generator or stabilizer.
6. Telephone, CCTV, BMS or IoT integration (available on request — separately quoted).
7. Any taxes, duties or municipality fees other than those explicitly mentioned.
8. Lifting equipment / cranes if access requires more than standard manual handling.
9. Working at heights above 3 m (additional scaffolding cost shall apply).
10. Insulated floor, floor panels or floor finish works.
11. Any item not specifically listed in the Scope of Work.

10. PRICING / BILL OF QUANTITIES

SL#	Description (Size & Quantity)	Amount (QAR)
1	CHILLER ROOM 01 — 3.00 m × 2.00 m × 2.00 m (12 m^3), +2°C to +8°C: supply & installation of 100 mm PUF panels for walls and ceiling (26.00 sqm), one (1) hinged door 900 × 1900 mm, 2 HP Tecumseh / Danfoss condensing unit with Tecumseh / Gunay evaporator, copper piping, insulation, drain line, digital control panel, LED light, aluminum angles, silicone sealing and accessories, including testing & commissioning.	21,500.00
2	CHILLER ROOM 02 — 4.00 m × 3.00 m × 2.00 m (24 m^3), +2°C to +8°C: supply & installation of 100 mm PUF panels for walls and ceiling (40.00 sqm), one (1) hinged door 900 × 1900 mm, 2.5 HP Tecumseh / Danfoss condensing unit with Tecumseh / Gunay evaporator, copper piping, insulation, drain line, digital control panel, LED light, aluminum angles, silicone sealing and accessories, including testing & commissioning.	23,800.00

GRAND TOTAL (Lump Sum)	**QAR 45,300.00**

Amount in Words: ***Qatari Riyals Forty Five Thousand Three Hundred Only.***



11. WARRANTY

Cold Room Panels & Door	12 months from date of handover against manufacturing defects
Refrigeration Compressor	12 months from date of commissioning (manufacturer warranty)
Evaporator & Condenser Coils	12 months from date of commissioning
Electrical Components & Controls	12 months from date of commissioning
Workmanship	12 months from date of handover
Warranty Exclusions	Damage due to misuse, power surge, improper voltage, water ingress, unauthorized modification or absence of routine maintenance

12. DELIVERY & WORK COMPLETION

Material Delivery	3 – 4 weeks from date of LPO and approved advance payment
Site Mobilization	Within 3 working days of material arrival at site
Installation Period	5 – 7 working days for civil-ready site
Testing & Commissioning	1 – 2 working days after installation completion
Total Project Duration	Approx. 4 – 5 weeks from LPO (subject to site readiness)
Working Hours	Standard working days, 08:00 – 17:00 (extended hours billed separately)



13. PAYMENT & COMMERCIAL TERMS

1. 50% advance payment along with confirmed Local Purchase Order (LPO).
2. 40% on delivery of materials at site.
3. 10% balance after successful testing, commissioning and handover.
4. Payment by cheque / bank transfer in favor of The New Doha Kitchen Equipment Services W.L.L.
5. Prices are quoted in Qatari Riyals (QAR) and are exclusive of VAT, if applicable.
6. This quotation is valid for 15 days from the date of issue.

We trust that the above offer meets your requirements and look forward to your favorable response. Should you require any further clarification or technical detail, please do not hesitate to contact us.

Thank you for the opportunity.

Best Regards,

Farhan
Sales Engineer
The New Doha Kitchen Equipment Services W.L.L & Doha Cooling Trading & Solutions W.L.L
Email: farhan@dctsqatar.com